



Designated according to The Construction Products (Amendment etc.) (EU Exit) Regulations 2020

UK Technical Assessment	UKTA-0836-22/6371 of 07/11/2022
Technical Assessment Body issuing the UK Technical Assessment:	British Board of Agrément
Trade name of the construction product:	R-DCA, R-DCA-A4 and R-DCL Wedge Anchors
Product family to which the construction product belongs:	Area Code 33, Fasteners for use in concrete for redundant non-structural applications
Manufacturer:	RAWLPLUG S.A. ul. Kwidzyńska 6 51-416 Wrocław Poland
Manufacturing plant(s):	Manufacturing Plant No. 6 Manufacturing Plant No. 7 Manufacturing Plant No. 20
This UK Technical Assessment contains:	18 pages including 3 annexes which form an integral part of this assessment
This UK Technical Assessment is issued in accordance with The Construction Products (Amendment etc.) (EU Exit) Regulations 2020 on the basis of:	UKAD 330747-00-0601 <i>Fasteners for use in concrete for redundant non-structural systems</i>

Communication of this UK Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may be made with the written consent of the British Board of Agrément. Any partial reproduction must be identified as such.

1 Technical description of the product

The R-DCA, R-DCA-A4 and R-DCL Wedge Anchors are deformation-controlled expansion anchors in sizes of M6, M8, M10, M12, M16 and M20. The anchors R-DCA and R-DCL are manufactured from galvanized steel and R-DCA-A4 are manufactured from stainless steel.

The anchor is installed in a drilled hole and anchored by deformation-controlled expansion.

The description of the product is given in Annex A.

2 Specification of the intended use(s) in accordance with the applicable UK Assessment Document (hereinafter UKAD)

The performances given in Section 3 are only valid if the anchors are used in compliance with the specifications and conditions given in Annex B.

The performances given in this UK Technical Assessment are based on an assumed working life of the anchor of 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer or the Technical Assessment Body, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Not relevant.

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Anchors satisfy requirements for Class A1
Resistance to fire	Annex C4

3.3 Health, hygiene and the environment (BWR 3)

Not relevant.

3.4 Safety and accessibility in use (BWR 4)

Essential characteristic	Performance
Characteristic resistance for all load directions	Annex C1 – C3
Edge distances and spacing	Annex C1 – C3

3.5 Protection against noise (BWR 5)

Not relevant.

3.6 Energy economy and heat retention (BWR 6)

Not relevant.

3.7 Sustainable use of natural resources (BWR 7)

No performance assessed.

4 Assessment and verification of constancy of performance (hereinafter AVCP) system applied

4.1 System of assessment and verification of constancy of performance

According to UKAD No. 330747-00-0601 and Annex V of the Construction Products Regulation (Regulation (EU) 305/2011 as brought into UK law and amended, the system of assessment and verification of constancy of performance (AVCP) 2+ applies.

5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable UKAD

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited with the British Board of Agrément and made available to the UK Approved Bodies involved in the conformity attestation process.

5.1 UKCA marking for the product/ system must contain the following information:

- Identification number of the Approved Body
- Name/address of the manufacturer of the product/ system
- Marking with intention of clarification of intended use
- Date of marking
- Number of certificate of constancy of performance
- UKTA number.

On behalf of the British Board of Agrément



Date of Issue: 7 November 2022


Hardy Giesler
Chief Executive Officer




British Board of Agrément,
1st Floor Building 3
Hatters Lane
Croxley Park
Watford
WD18 8YG

ANNEXES


This annex applies to the product described in the main body of the UK Technical Assessment.

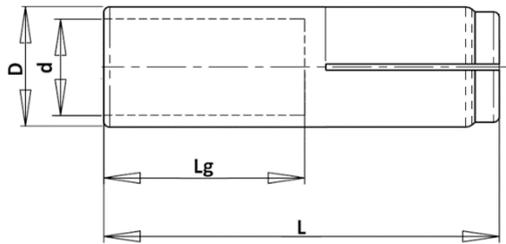


R-DCA and R-DCA-A4 sleeve

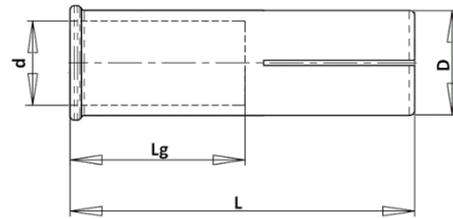

R-DCL sleeve

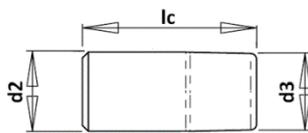

expansion plug



Marking:
Identifying mark – **RAWL**
Size: Mxx (A4)
xx – thread size
A4 – for stainless steel

Table A1. Anchors R-DCA – materials and dimensions

R-DCA		M6/25	M8/30	M10/40	M12/50	M16/65	M20/80
Anchor length L	[mm]	25	30	40	50	65	80
Inner diameter d	[mm]	6	8	10	12	16	20
External diameter D	[mm]	8	10	12	15	20	25
Thread length Lg	[mm]	11	14	19	25	28	38
Anchor material	Steel in accordance with ASTM A510, SAE 1008 or SAE 1010; zinc coating > 5 μm $f_{uk} \geq 450 \text{ N.mm}^{-2}$ and $f_{yk} \geq 360 \text{ N.mm}^{-2}$						
Fastening screw or threaded rod material	Steel, property class ≥ 4.8 according to EN-ISO 898-1; zinc coating > 5 μm						

Table A2. Anchor R-DCA-A4 – materials and dimensions

R-DCA-A4		M6/25	M8/30	M10/40	M12/50	M16/65
Anchor length L	[mm]	25	30	40	50	65
Inner diameter d	[mm]	6	8	10	12	16
External diameter D	[mm]	8	10	12	15	20
Thread length Lg	[mm]	11	14	19	25	28
Anchor material	Stainless steel 1.4401 according to EN 10088 (AISI 316) $f_{uk} \geq 500 \text{ N.mm}^{-2}$ and $f_{yk} \geq 210 \text{ N.mm}^{-2}$					
Fastening screw or threaded rod material	Stainless steel 1.4401 in accordance with EN 10088; property class ≥ 70 according to EN ISO 3506					

R-DCA, R-DCA-A4 and R-DCL Wedge Anchors

Product description
Characteristics of the product

Annex A 1

Table A3. Anchors R-DCL – materials and dimensions

R-DCL		M6/25	M8/25	M8/30	M10/25	M10/30	M10/40	M12/25	M12/50	M16/65	M20/80
Anchor length L	[mm]	25	25	30	25	30	40	25	50	65	80
Inner diameter d	[mm]	6	8	8	10	10	10	12	12	16	20
External diameter D	[mm]	8	10	10	12	12	12	15	15	20	25
Thread length L _g	[mm]	11	14	14	14	15	19	14	25	28	38
Anchor material	Steel in accordance with ASTM A510, SAE 1008 or SAE 1010; zinc coating > 5 μm f _{uk} ≥ 450 N.mm ⁻² and f _{yk} ≥ 360 N.mm ⁻²										
Fastening screw or threaded rod material	Steel, property class ≥ 4.8 according to EN-ISO 898-1, zinc coating > 5 μm, for anchoring in solid concrete elements and steel, property class ≥ 4.6 according to EN-ISO 898-1, zinc coating > 5 μm, for anchoring in precast hollow core slabs										

Table A4. Expansion plug – materials and dimensions

		M6/25	M8/25	M8/30	M10/25	M10/30	M10/40	M12/25	M12/50	M16/65	M20/80
Expansion plug		M6	M8	M8	M10	M10	M10	M12	M12	M16	M20
Rear diameter d ₂	[mm]	4.90	6.30	6.40	8.00	7.80	8.00	9.80	10.30	13.55	16.55
Front diameter d ₃	[mm]	4.15	5.10	5.10	7.00	6.70	6.80	8.80	7.80	12.20	14.95
Length l _c	[mm]	9.40	8.00	11.40	8.00	13.60	16.00	8.00	20.75	25.40	30.00
Expansion plug material	Steel in accordance with JISG3505, SWRM8K or SWRM10K; zinc coating > 5 μm or stainless steel 1.4401 according to EN 10088 (AISI 316)										

R-DCA, R-DCA-A4 and R-DCL Wedge Anchors

Product description
Characteristics of the product

Annex A 2

SPECIFICATION OF INTENDED USE

Anchorage subject to:

- Multiple use for non-structural applications: sizes from M6 to M20 (R-DCA and R-DCL) and sizes from M6 to M16 (R-DCA-A4).
- Static and quasi-static loads: sizes from M6 to M20 (R-DCA and R-DCL) and sizes from M6 to M16 (R-DCA-A4).
- Anchorages with requirements related to resistance to fire: sizes from M8 to M20 (R-DCA and R-DCL) and sizes from M8 to M16 (R-DCA-A4), in solid concrete elements of strength class C20/25 to C50/60 according to EN 206.

Base material:

- Reinforced or unreinforced, cracked or non-cracked normal weight concrete of strength class C12/15 at minimum to C50/60 at maximum according to EN 206.
- Solid concrete elements: sizes from M6 to M20 (R-DCA, R-DCL) and M6 to M16 (R-DCA-A4).
- Precast prestressed hollow core slabs (with $w/e \leq 4,2$) strength class C40/50 to C50/60 according to EN 206: sizes from M6 to M12 (R-DCL).

Use conditions (environmental conditions):

- R-DCA, R-DCL all sizes (galvanized steel) and R-DCA-A4 size M6 (stainless steel): structures subject to dry internal conditions.
- R-DCA-A4 sizes from M8 to M16 (stainless steel): structures subject to dry internal conditions and also in concrete subject to external atmospheric exposure (including industrial and marine environment) or exposure in permanently damp internal conditions if no particular aggressive conditions exist. Such particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used).

Design:

- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are prepared taking account of the loads to be transmitted. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.).
- Anchorages under static and quasi-static loads are designed in accordance with EN 1992-4:2018; the anchors R-DCA, R-DCA-A4 and R-DCL anchored in solid concrete elements according to design method C, the anchors R-DCL anchored in precast, prestressed hollow core slabs according to design method B.
- The design of anchorages under fire exposure has to consider the conditions given in the EOTA Technical Report TR 020.
- Fasteners are only to be used for multiple use for non-structural applications acc. to EAD 330747-00-0601.

Installation:

- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- Use of the anchor only as supplied by the manufacturer without exchanging any component of the anchor.
- Anchor installation in accordance with the manufacturer's specifications and drawings and using the appropriate tools.
- Check of concrete being well compacted, e.g. without significant voids.
- Positioning of the drill holes without damaging the reinforcement.
- In case of aborted hole: new drilling at a minimum distance away of twice the depth of the aborted hole or smaller distance if the aborted drill hole is filled with high strength mortar and if under shear or oblique tension load it is not in the direction of load application.
- Anchor installation such that the effective anchorage depth is complied with.
- Anchor expansion by impact on the cone (expansion plug) of the anchor.

R-DCA, R-DCA-A4 and R-DCL Wedge Anchors

Intended Use
Specification

Annex B 1

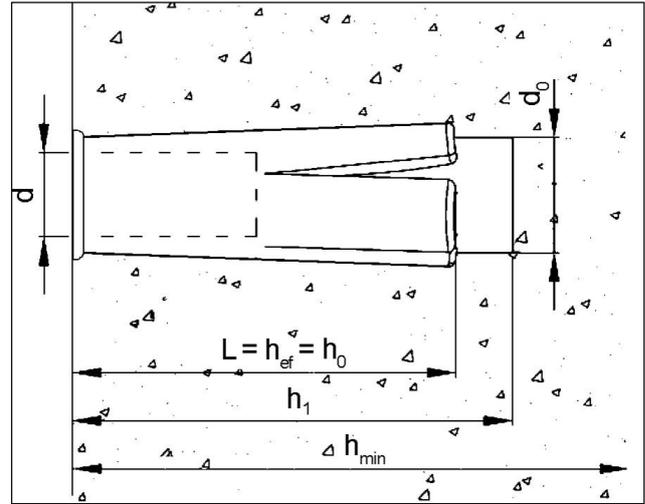
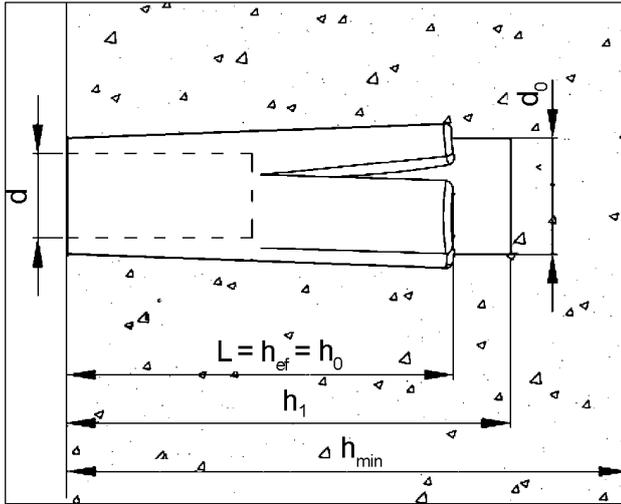



Table B1: Installation parameters of R-DCA, R-DCA-A4 and R-DCL anchors in solid concrete elements

Anchor size	Drill hole diameter	Drill hole depth	Effective anchorage depth	Torque (max)	Thickness of concrete member (min)	Screwing depth (min)	Screwing depth (max)	Diameter of clearance hole in the fixture
	[mm]	[mm]	[mm]	[Nm]	[mm]	[mm]	[mm]	[mm]
	d_0	h_1	$h_{ef} = h_0$	$\max T_{inst}$	h_{min}	$l_{s, min}$	$l_{s, max}$	d_f
M6/25	8	27	25	4.5	80	6	11	7
M8/25	10	27	25	11	80	8	13	9
M8/30	10	32	30	11	80	8	13	9
M10/25	12	27	25	22	80	10	13	12
M10/30	12	32	30	22	80	10	13	12
M10/40	12	42	40	22	80	10	15	12
M12/25	15	27	25	38	80	12	13	14
M12/50	15	52	50	38	100	12	25	14
M16/65	20	67	65	98	130	16	25	18
M20/80	25	82	80	130	160	20	35	22

R-DCA, R-DCA-A4 and R-DCL Wedge Anchors

Intended Use
Installation parameters – solid concrete elements

Annex B 2

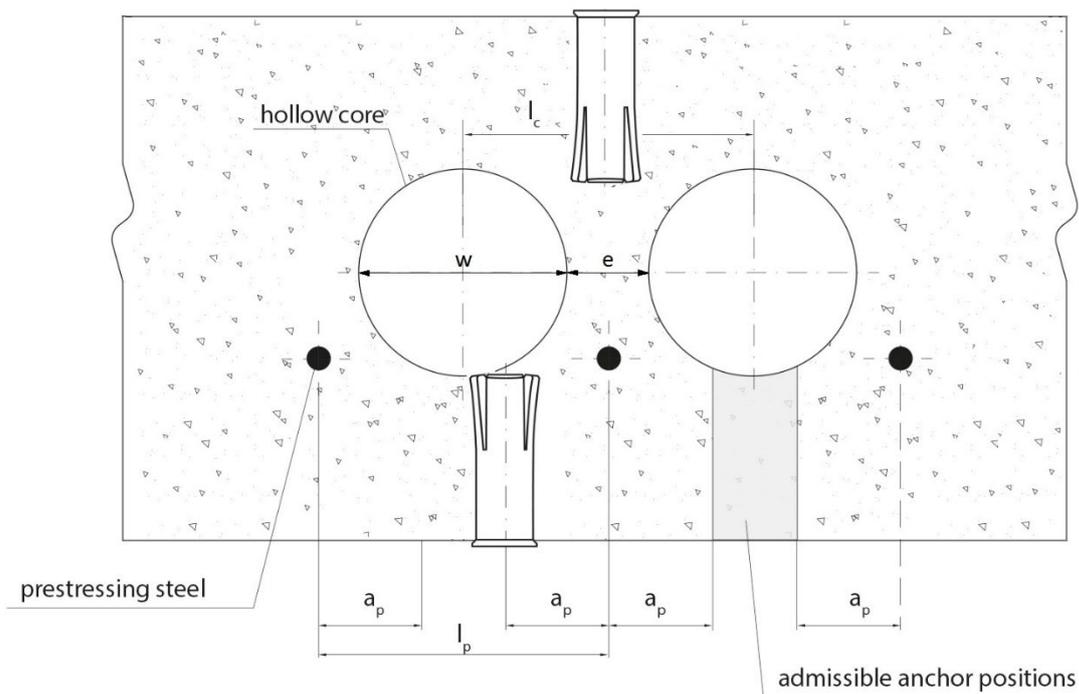

Core width / Web thickness; w / e	$\leq 4,2$
Core distance	$l_c \geq 100 \text{ mm}$
Prestressing steel	$l_p \geq 100 \text{ mm}$
Distance between anchor position and prestressing steel	$a_p \geq 50 \text{ mm}$

Table B2: Installation parameters of R-DCL anchors in precast, prestressed hollow core slabs

Anchor size	Drill hole diameter	Drill hole depth	Effective anchorage depth	Torque (max)	Screwing depth (min)	Screwing depth (max)	Diameter of clearance hole in the fixture
	[mm]	[mm]	[mm]	[Nm]	[mm]	[mm]	[mm]
	d_0	h_0	h_{ef}	$\max T_{inst}$	$l_{s, min}$	$l_{s, max}$	d_f
M6/25	8	25	25	4.5	6	11	7
M8/25	10	27	25	11	8	13	9
M8/30	10	32	30	11	8	13	9
M10/25	12	27	25	22	10	13	12
M10/30	12	32	30	22	10	13	12
M10/40	12	42	40	22	10	15	12
M12/25	15	27	25	38	12	13	14
M12/50	15	52	50	38	12	25	14

R-DCA, R-DCA-A4 and R-DCL Wedge Anchors

Intended Use

Installation parameters – precast, prestressed hollow core slabs

Annex B 3

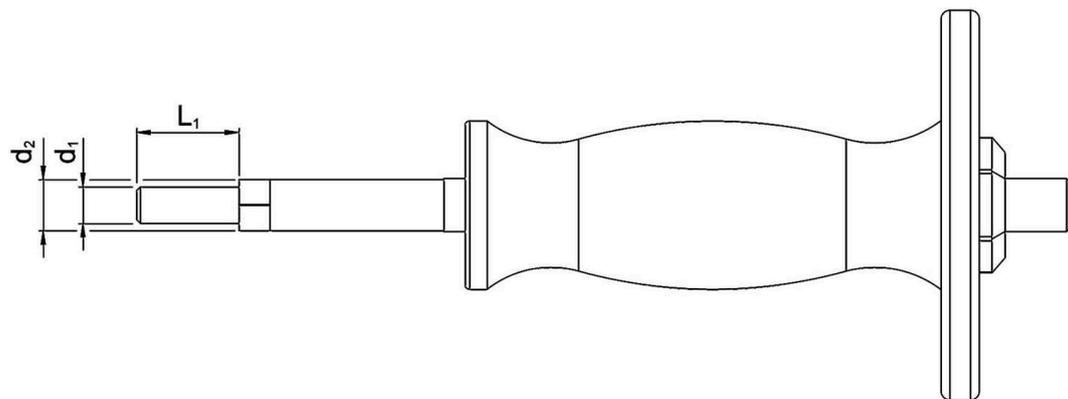
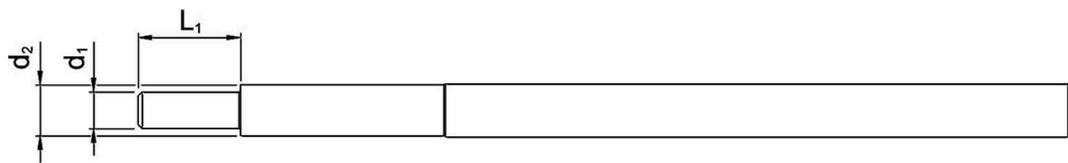
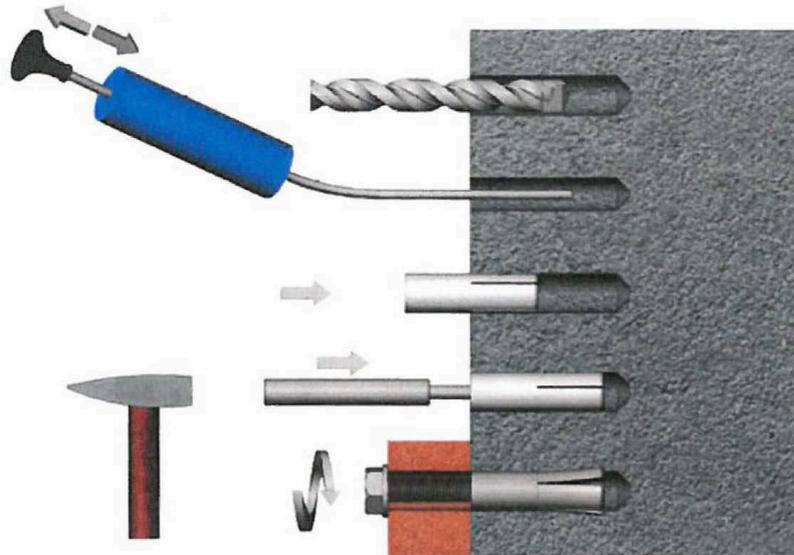



Table B3: Installation tools

Installation tools		M6/ 25	M8/ 25	M8/ 30	M10/ 25	M10/ 30	M10/ 40	M12/ 25	M12/ 50	M16/ 65	M20/ 80
Diameter d_1	mm	5.0	6.6	6.6	8.3	8.3	8.3	10.2	10.2	13.5	16.8
Diameter d_2	mm	7.5	9.5	9.5	11.5	11.5	11.5	14.5	14.5	19.5	24.5
Length L_1	mm	14.8	17.0	18.0	17.0	18	23.0	17.0	28.0	33.0	47.0


R-DCA, R-DCA-A4 and R-DCL Wedge Anchors

Intended Use
Installation instruction – general

Annex B 4

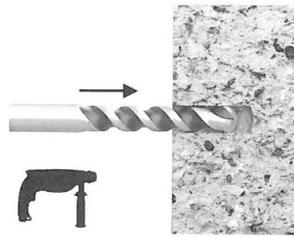


Drill a hole of required diameter and depth.

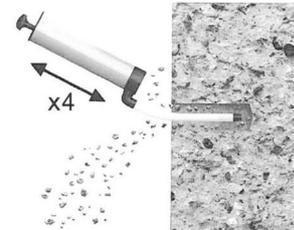


Clear the hole of drilling dust and debris (using blow pump).




Insert the anchor (slotted end first).

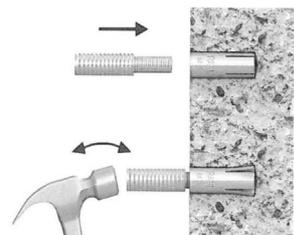

Use the setting tool to drive the internal wedge into the anchor.

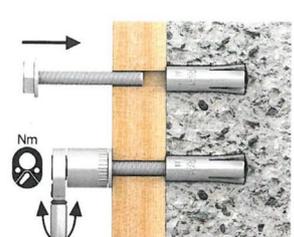

Insert screw or threaded rod through fixture and tighten, not pass over the maximum torque.

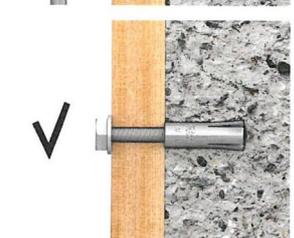


After installation.

R-DCA, R-DCA-A4 and R-DCL Wedge Anchors


Intended Use

Installation instruction – R-DCA and R-DCA-A4 anchor in solid concrete element

Annex B 5

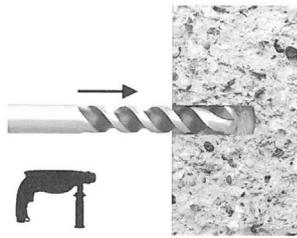

Drill a hole of required diameter and depth.

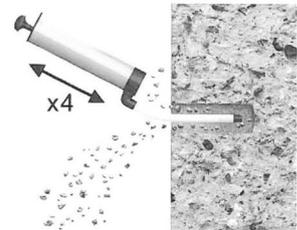


Clear the hole of drilling dust and debris (using blow pump).



Insert the anchor (slotted end first).



Use the setting tool to drive the internal wedge into the anchor.

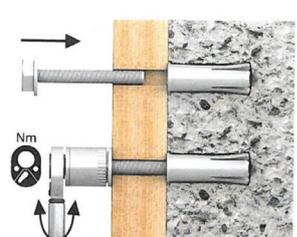

Insert screw or threaded rod through fixture and tighten, not pass over the maximum torque.



After Installation.

R-DCA, R-DCA-A4 and R-DCL Wedge Anchors

Intended Use

Installation instruction – R-DCL anchor in solid concrete element


Annex B 6



Drill a hole of required diameter and depth.



Clear the hole of drilling dust and debris (using blow pump).



Insert the anchor (slotted end first).



Use the setting tool to drive the internal wedge into the anchor.



Insert screw or threaded rod through fixture and tighten, not pass over the maximum torque.



After installation.



R-DCA, R-DCA-A4 and R-DCL Wedge Anchors

Intended Use

Installation instruction – R-DCL anchor in precast, prestressed hollow core slabs

Annex B 7

Table C1: Characteristic resistance – R-DCA – in solid concrete elements

R-DCA			Property class	M6/25	M8/30	M10/40	M12/50	M16/65	M20/80
All load directions (fastening screw or threaded rod property class ≥ 4.8)									
Characteristic resistance in cracked and non-cracked concrete C12/15	F_{Rk}	[kN]	≥ 4.8	1.2	2	3.5	5	10	13
Characteristic resistance in cracked and non-cracked concrete C20/25 to C50/60	F_{Rk}	[kN]	≥ 4.8	1.5	3	4.5	6	13	17
Partial safety factor	$\gamma_2^{(1)}$	[-]	-	1.2					
Spacing	s_{cr}	[mm]		200				260	320
Edge distance	c_{cr}	[mm]		150				195	240
Shear load with lever arm									
Characteristic bending resistance	$M^0_{Rk,s}$	[Nm]	4.8	6	15	30	52	133	260
Characteristic bending resistance	$M^0_{Rk,s}$	[Nm]	5.8	8	19	37	66	167	325
Characteristic bending resistance	$M^0_{Rk,s}$	[Nm]	6.8	9	23	45	79	200	390
Characteristic bending resistance	$M^0_{Rk,s}$	[Nm]	8.8	12	30	60	105	267	520
Partial safety factor	$\gamma_{Ms}^{(1)}$	[-]	-	1.25					

(1) in the absence of other national regulations

Table C2: Characteristic resistance – R-DCA-A4 – in solid concrete elements

R-DCA-A4			Property class	M6/25	M8/30	M10/40	M12/50	M16/65
All load directions (fastening screw or threaded rod property class A4-70)								
Characteristic resistance in cracked and non-cracked concrete C12/15	F_{Rk}	[kN]	A4-70	0.75	1.5	2.5	3.5	6.5
Characteristic resistance in cracked and non-cracked concrete C20/25 to C50/60	F_{Rk}	[kN]	A4-70	1.0	2.0	3.0	4.5	8.0
Partial safety factor	$\gamma_2^{(1)}$	[-]	-	1.2				
Spacing	s_{cr}	[mm]		200				260
Edge distance	c_{cr}	[mm]		150				195
Shear load with lever arm								
Characteristic bending resistance	$M^0_{Rk,s}$	[Nm]	A4-70	11	26	52	92	233
Partial safety factor	$\gamma_{Ms}^{(1)}$	[-]	-	1.25				

(1) in the absence of other national regulations

R-DCA, R-DCA-A4 and R-DCL Wedge Anchors

Performances
Characteristic resistance

Annex C 1

Table C3: Characteristic resistance – R-DCL – in solid concrete elements

R-DCL			Property class	M6/25	M8/25	M8/30	M10/25	M10/40	M12/25	M12/50	M16/65	M20/80	
All load directions (fastening screw or threaded rod property class ≥ 4.8)													
Characteristic resistance in cracked and non-cracked concrete class C12/15	F_{Rk}	[kN]	≥ 4.8	1.2	0.75	2	1.2	3.5	1.5	5	10	13	
Characteristic resistance in cracked and non-cracked concrete class C20/25 to C50/60	F_{Rk}	[kN]	≥ 4.8	1.5	1	3	1.5	4.5	2	6.5	13	17	
Partial safety factor	$\gamma_2^{(1)}$	[-]	–	1.2									
Spacing	s_{cr}	[mm]		200								260	320
Edge distance	c_{cr}	[mm]		150								195	240
Shear load with lever arm													
Characteristic bending resistance	$M^0_{Rk,s}$	[Nm]	4.8	6	15	15	30	30	52	52	133	260	
Characteristic bending resistance	$M^0_{Rk,s}$	[Nm]	5.8	8	19	19	37	37	66	66	167	325	
Characteristic bending resistance	$M^0_{Rk,s}$	[Nm]	6.8	9	23	23	45	45	79	79	200	390	
Characteristic bending resistance	$M^0_{Rk,s}$	[Nm]	8.8	12	30	30	60	60	105	105	267	520	
Partial safety factor	$\gamma_{Ms}^{(1)}$	[-]	–	1.25									

(1) in the absence of other national regulations

R-DCA, R-DCA-A4 and R-DCL Wedge Anchors

Performances
Characteristic resistance

Annex C 2

Table C4: Characteristic resistance – R-DCL – in precast, prestressed hollow core slabs

R-DCL			Property class	M6/25	M8/25	M8/30	M10/25	M10/30	M10/40	M12/25	M12/50	
All load directions (fastening screw or threaded rod property class ≥ 4.6)												
Bottom flange thickness	d_b	[mm]	–	30	40	30	40	40	30	40	30	
Characteristic resistance in hollow concrete slabs class C40/50 to C50/60	F_{Rk}	[kN]	≥ 4.6	3.5	4.5	4.0	5.5	12	14	7	16	
Partial safety factor	γ_{inst}	[–]	–	1.4	1.4	1.4	1.4	1.0	1.4	1.4	1.2	
Spacing	s_{cr}	[mm]		200								
Edge distance	c_{cr}	[mm]		300								
Shear load with lever arm												
Characteristic bending resistance	$M^0_{Rk,s}$	[Nm]	4.6	6	15	15	30	30	30	52	52	
Characteristic bending resistance	$M^0_{Rk,s}$	[Nm]	4.8	6	15	15	30	30	30	52	52	
Characteristic bending resistance	$M^0_{Rk,s}$	[Nm]	5.8	8	19	19	37	37	37	66	66	
Characteristic bending resistance	$M^0_{Rk,s}$	[Nm]	6.8	9	23	23	45	45	45	79	79	
Characteristic bending resistance	$M^0_{Rk,s}$	[Nm]	8.8	12	30	30	60	60	60	105	105	
Partial safety factor	$\gamma_{Ms}^{(1)}$	[–]	–	1.25								

(1) in the absence of other national regulations

R-DCA, R-DCA-A4 and R-DCL Wedge Anchors

Performances
Characteristic resistance

Annex C 3

Table C5: Characteristic resistance under fire exposure in solid concrete elements of strength class C20/25 to C50/60 – R-DCA and R-DCL

Fire resistance class	R-DCA and R-DCL	M8/25	M8/30	M10/25	M10/40	M12/25	M12/50	M16/65	M20/80	
All load directions										
R30	Characteristic resistance $F_{Rk,fi}^{(1),(2)}$	[kN]	0.1	0.4	0.2	0.9	0.3	1.6	3.1	4.3
R60		[kN]	0.1	0.3	0.2	0.8	0.3	1.3	2.4	3.7
R90		[kN]	0.1	0.3	0.2	0.6	0.3	1.1	2.0	3.2
R120		[kN]	0.1	0.2	0.2	0.5	0.2	0.8	1.6	2.5
Spacing	$s_{cr,fi}$	[mm]	4 x h_{ef}							
Edge distance	$c_{cr,fi}$	[mm]	2 x h_{ef}							
The design method covers anchors with a fire attack from one side only. In case of fire attack from more than one side, the edge distance shall be ≥ 300 mm.										

(1) in the absence of other national regulations a partial safety factor $\gamma_{m,fi} = 1.0$ is recommended

(2) fastening screw or threaded rod property class not less than 4.8

Table C6: Characteristic resistance under fire exposure in solid concrete elements of strength class C20/25 to C50/60 – R-DCA-A4

Fire resistance class	R-DCA-A4	M8/30	M10/40	M12/50	M16/65	
All load directions						
R30	Characteristic resistance $F_{Rk,fi}^{(1),(2)}$	[kN]	0.5	0.8	1.1	2.1
R60		[kN]	0.5	0.8	1.1	2.1
R90		[kN]	0.5	0.8	1.1	2.1
R120		[kN]	0.4	0.6	0.9	1.6
Spacing	$s_{cr,fi}$	[mm]	4 x h_{ef}			
Edge distance	$c_{cr,fi}$	[mm]	2 x h_{ef}			
The design method covers anchors with a fire attack from one side only. In case of fire attack from more than one side, the edge distance shall be ≥ 300 mm.						

(1) in the absence of other national regulations a partial safety factor $\gamma_{m,fi} = 1.0$ is recommended

(2) fastening screw or threaded rod property class not less than A4-70

R-DCA, R-DCA-A4 and R-DCL Wedge Anchors

Performances
Characteristic resistance

Annex C 4



British Board of Agrément,
1st Floor Building 3
Hatters Lane
Croxley Park
Watford
WD18 8YG