


## R-FRG Ring full head nails, galvanized on paper

Ring shank galvanised nails for timber framing, roofing and other timber applications



### Certificate

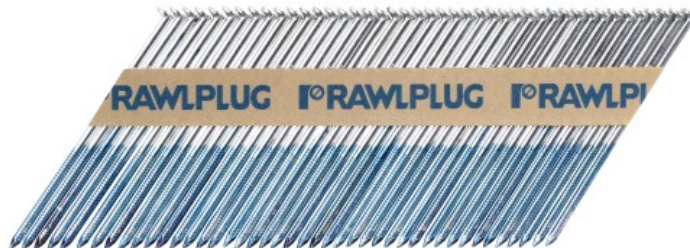

### Product information

#### Features and benefits

- 34° angle collation ensures the nail is compatible with all leading manufactures tools
- Special coating at the base of the shank improves the drive of the nail and ensures a secure fixing
- Diamond point prevents the timber from splitting
- Waxed paper collation avoids deterioration in wet conditions
- [English]: łączenie taśmą plastikową
- 12um zinc coating provides protection according to Eurocode 5, service class 2 compliant
- [English]: Opakowanie gwoździ zawiera odpowiednio 2, lub 3 gazy, które wystarczają do zamontowania zawartości opakowania

#### Applications

- Timber frame stud work in timber framing industry
- Installation of battens and sheathing in roof construction
- Installation of soffits and other roof finishing elements
- Installation of wooden facades and other external trim

#### Corresponding products

- R-GP6 Fuel cell for use in R-WW90II
- R-WW90II Gas powered framing nailer

#### Base materials

- Timber
- Plywood
- Chipboard
- Wood

## Product commercial data

Index	Fastener diameter	Length	Head type	Shank type	Finish	Protection	Collation	Fasteners per strip	Carton quantity	Fuel cells per carton	Box weight	Outer weight	EAN
	[mm]	[mm]						[pcs]	[pcs]	[pcs]	kg	kg	
R-FRG-2851	2.8	51	Clipped head	RING	Silver Galvanized	Minimum 12 microns	34° paper laminated	44	3300	3	9.00	9.00	5906675484617
R-FRG-2863	2.8	63	Clipped head	RING	Silver Galvanized	Minimum 12 microns	34° paper laminated	44	3300	3	11.00	11.00	5906675484624
R-FRG-2870	2.8	70	Clipped head	RING	Silver Galvanized	Minimum 12 microns	34° paper laminated	44	3300	3	12.04	12.04	5906675484631
R-FRG-2875	2.8	75	Clipped head	RING	Silver Galvanized	Minimum 12 microns	34° paper laminated	44	3300	3	12.88	12.88	5906675484648
R-FRG-3163	3.1	63	Clipped head	RING	Silver Galvanized	Minimum 12 microns	34° paper laminated	44	3300	3	12.97	12.97	5906675484655
R-FRG-3175	3.1	75	Clipped head	RING	Silver Galvanized	Minimum 12 microns	34° paper laminated	44	2200	2	10.32	10.32	5906675484662
R-FRG-3190	3.1	90	Clipped head	RING	Silver Galvanized	Minimum 12 microns	34° paper laminated	44	2200	2	12.13	12.13	5906675484679