


R-DPHDG paper collated nails with fuel cells hot dipped galvanised

Smooth shank hot dipped galvanised nails for timber framing, roofing and wooden facades installation



Certificate

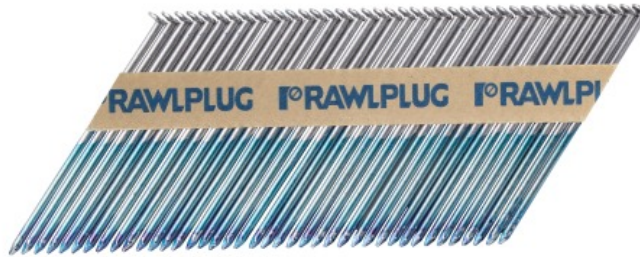

Product information

Features and benefits

- 34° angle collation with a clipped head ensures the nail is compatible with all leading manufactures tools
- Special coating at the base of the shank improves the drive of the nail and ensures a secure fixing
- Diamond point prevents the timber from splitting
- Waxed paper collation avoids deterioration in wet conditions
- [English]: łączenie taśmą plastikową
- Minimum of 50 micron zinc coating provides high corrosion protection
- Depending on the quantity of nails box contains 1,2 or 3 fuel cells

Applications

- Timber frame stud work in timber framing industry
- Roof battens installation
- Decking
- Cladding and panelling and installation of other external trim
- Floor boarding

Corresponding products

- R-RAWL-WW90CH Gas powered framing nailer
- R-WW90II Gas powered framing nailer

Base materials

- Timber
- Plywood
- Chipboard
- Wood



Product commercial data

Index	Fastener diameter	Length	Head type	Shank type	Finish	Protection	Collation	Fasteners per strip	Carton quantity	Fuel cells per carton	Box weight	Outer weight	EAN
	[mm]	[mm]						[pcs]	[pcs]	[pcs]	kg	kg	
R-DPHDG-3190	3.1	90	Clipped head	Smooth	Hot dipped galvanised	Minimum 50 microns	34° paper laminated	44	2200	2	13.14	13.14	5906675047461
R-DPHDG-3175	3.1	75	Clipped head	Smooth	Hot dipped galvanised	Minimum 50 microns	34° paper laminated	44	2200	2	10.56	10.56	5906675512327
R-DPHDG-2863	2.8	63	Clipped head	Smooth	Hot dipped galvanised	Minimum 50 microns	34° paper laminated	44	3300	3	12.05	12.05	5906675512310
R-DPHDG-2851	2.8	50	Clipped head	Smooth	Hot dipped galvanised	Minimum 50 microns	34° paper laminated	44	3300	3	10.85	10.85	5906675512303
SPG-DPHDG-2851	2.8	50	Clipped head	Smooth	Hot dipped galvanised	Minimum 50 microns	34° paper laminated	44	3300	0	10.19	10.19	5906675500942
SPG-DPHDG-2863	2.8	63	Clipped head	Smooth	Hot dipped galvanised	Minimum 50 microns	34° paper laminated	44	3300	0	11.39	11.39	5906675500959
SPG-DPHDG-3175	3.1	75	Clipped head	Smooth	Hot dipped galvanised	Minimum 50 microns	34° paper laminated	44	2200	0	10.12	10.12	5906675500966
SPG-DPHDG-3190	3.1	90	Clipped head	Smooth	Hot dipped galvanised	Minimum 50 microns	34° paper laminated	44	2200	0	13.14	13.14	5906675500973