

R-DRHDG Ring collated nails with fuel cells - hot deep galvanized

Ring shank hot dipped galvanised nails for timber framing, roofing and wooden facades installation



Certificate



Product information

Features and benefits

- 34° angle collation with a clipped head ensures the nail is compatible with all leading manufactures tools
- Special coating at the base of the shank improves the drive of the nail and ensures a secure fixing
- Diamond point prevents the timber from splitting
- Waxed paper collation avoids deterioration in wet conditions
- Paper tape collation ensures that no collating material is left on the work site
- Minimum of 50 micron zinc coating provides high corrosion protection
- Depending on the quantity of nails box contains 1,2 or 3 fuel cells

Applications


- Timber frame stud work in timber framing industry
- Installation of battens and sheathing in roof construction
- Installation of soffits and other roof finishing elements
- Installation of wooden facades

Corresponding products

- R-RAWL-WW90CH Gas powered framing nailer

Base materials

- Timber
- Plywood
- Chipboard
- Wood

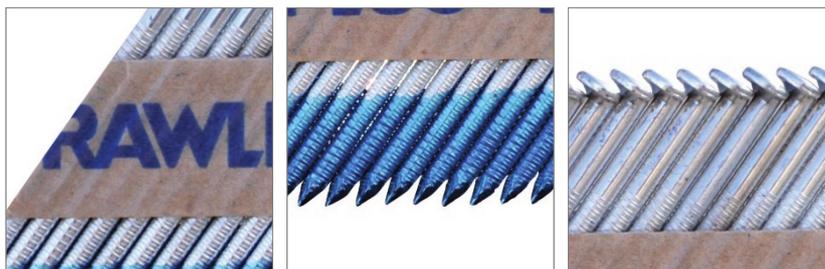

Product commercial data

Index	Fastener diameter	Length	Head type	Shank type	Finish	Protection	Fasteners per strip	Carton quantity	Fuel cells per carton	Collation	Box weight	Outer weight	EAN
	[mm]	[mm]					[pcs]	[pcs]	[pcs]		kg	kg	
R-DRHDG-2851	2.8	51	Clipped head	Ring	Hot dipped galvanised	Minimum 50 microns	44	3300	3	34° paper laminated	10.14	10.14	5906675047478
R-DRHDG-2863	2.8	63	Clipped head	Ring	Hot dipped galvanised	Minimum 50 microns	44	3300	3	34° paper laminated	11.33	11.33	5906675047485
R-DRHDG-3175	3.1	75	Clipped head	Ring	Hot dipped galvanised	Minimum 50 microns	44	2200	2	34° paper laminated	10.47	10.47	5906675047492
R-DRHDG-3190	3.1	90	Clipped head	Ring	Hot dipped galvanised	Minimum 50 microns	44	2200	2	34° paper laminated	12.45	12.45	5906675047508