

R-DRBH paper collated nails with fuel cells

Ring shank bright nails for timber framing, roofing and other timber applications



Product information

Features and benefits

- 34° angle collation with a clipped head ensures the nail is compatible with all leading manufactures tools
- Special coating at the base of the shank improves the drive of the nail and ensures a secure fixing
- Diamond point prevents the timber from splitting
- Waxed paper collation avoids deterioration in wet conditions
- [English]: łączenie taśmą plastikową
- Depending on the packaging box contains 1, 2 or 3 fuel cells
- A wide variety of combinations of nail coatings and finishes allows everyone to find the right solution for a particular application

Applications


- Timber frame stud work in timber framing industry
- Roof battens installation
- Decking
- Cladding and panelling and installation of other external trim
- Floor boarding

Corresponding products

- R-RAWL-WW90CH Gas powered framing nailer

Base materials

- Timber
- Wood
- Plywood
- Chipboard

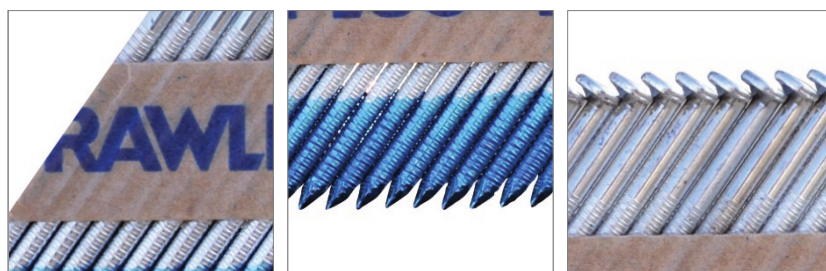

Product commercial data

Index	Fastener diameter	Length	Head type	Shank type	Finish	Protection	Collation	Fasteners per strip	Carton quantity	Fuel cells per carton	Box weight	Outer weight	EAN
	[mm]	[mm]						[pcs]	[pcs]	[pcs]	kg	kg	
R-DRBH-2851	2.8	51	Clipped head	Ring	Bright	Minimum 10m	34° paper laminated	44	1100	1	3.09	3.09	5906675021621
R-DRBH-2863	2.8	63	Clipped head	Ring	Bright	Minimum 10m	34° paper laminated	44	1100	1	4.02	4.02	5906675288765
R-DRBH-3163	3.1	63	Clipped head	Ring	Bright	Minimum 10m	34° paper laminated	44	1100	1			
R-DRBH-3175	3.1	75	Clipped head	Ring	Bright	Minimum 10m	34° paper laminated	44	1100	1	4.97	4.97	5906675288758
R-DRBH-3190	3.1	90	Clipped head	Ring	Bright	Minimum 10m	34° paper laminated	44	1100	1	6.23	6.23	5906675021614