

R-DRGH Ring collated nails with fuel cells in handy pack - galvanized

Ring shank galvanised nails for timber framing, roofing and other timber applications



Certificate



Product information

Features and benefits

- 34° angle collation with a clipped head ensures the nail is compatible with all leading manufactures tools
- Special coating at the base of the shank improves the drive of the nail and ensures a secure fixing
- Diamond point prevents the timber from splitting
- Waxed paper collation avoids deterioration in wet conditions
- [English]: łączenie taśmą plastikową
- 12um zinc coating provides protection according to Eurocode 5, service class 2 compliant
- Depending on the quantity of nails box contains 1,2 or 3 fuel cells

Applications


- Timber frame stud work in timber framing industry
- Installation of battens and sheathing in roof construction
- Installation of soffits and other roof finishing elements
- Installation of wooden facades

Corresponding products

- R-RAWL-WW90CH Gas powered framing nailer

Base materials

- Timber
- Plywood
- Chipboard
- Wood

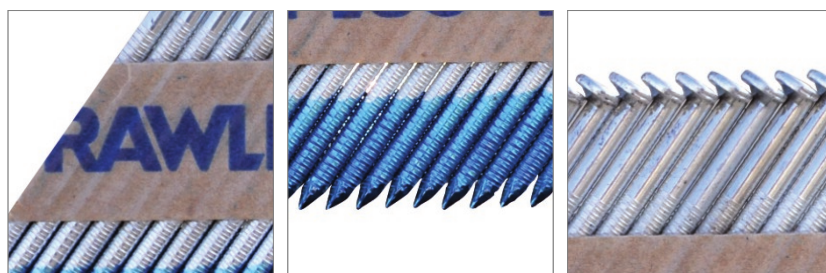

Product commercial data

Index	Fastener diameter	Length	Head type	Shank type	Finish	Protection	Collation	Fasteners per strip	Carton quantity	Fuel cells per carton	Box weight	Outer weight	EAN
	[mm]	[mm]						[pcs]	[pcs]	[pcs]	kg	kg	
R-DRGH-2863	2.8	63	Clipped head	Ring	Silver Galvanized	Minimum 12 microns	34° paper laminated	44	1100	1	3.77	3.77	5906675023410
R-DRGH-3163	3.1	63	Clipped head	Ring	Silver Galvanized	Minimum 12 microns	34° paper laminated	44	1100	1	4.14	4.14	5906675289328
R-DRGH-3190	3.1	90	Clipped head	Ring	Silver Galvanized	Minimum 12 microns	34° paper laminated	44	1100	1	6.16	6.16	5906675286181
R-DRGH-2851	2.8	51	Clipped head	Ring	Silver Galvanized	Minimum 12 microns	34° paper laminated	44	1100	1	3.17	3.17	5906675023403
R-DRGH-3175	3.1	75	Clipped head	Ring	Silver Galvanized	Minimum 12 microns	34° paper laminated	44	1100	1	5.12	5.12	5906675023427
R-DRGH-3190-V	3.1	90	Clipped head	Ring	Silver Galvanized	Minimum 12 microns	34° paper laminated	44	1100	1	6.16	6.16	5906675494395