


Straight brad nails

16 gauge straight brad nails for all second fix applications

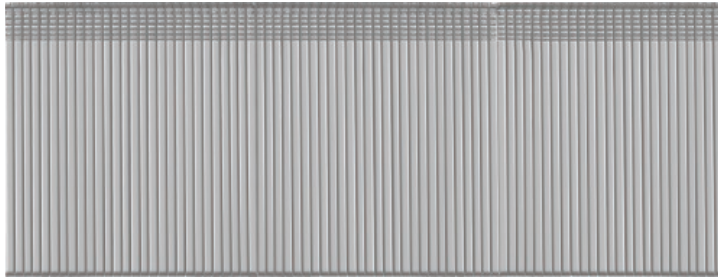

Product information

Features and benefits

- Smooth nail shank for low penetration resistance
- Chisel point to prevent timber from splitting
- T type head provides a concealed fixing
- The glue laminated collation ensures a lack of residue in the tool and on the work surface
- Available in galvanised or stainless steel for higher corrosion protection
- Compatible with all leading manufactures 16ga tools

Applications


- Installation of wooden facades and other external trim applications
- Installation of soffits and other roof finishing elements
- Installation of timber decorative elements on facades and other timber structures

Base materials

- Timber
- Plywood
- Chipboard
- Wood

Corresponding products

- R-RAWL-B1664 Gas powered second fix nailer

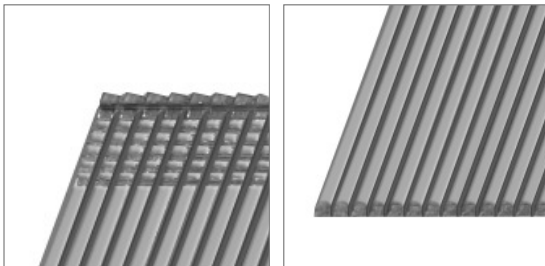

Product commercial data

Index	Gauge	Length	Finish	Collation	Fasteners per strip	Carton qu- antity	Fuel cells per carton	Box weight	Outer we- ight	EAN
		[mm]			[pcs]	[pcs]	[pcs]	kg	kg	
BRADS1619	16 Gauge	19	Galvanised	0° glue lami- nated	50	2000	2	0.78	0.78	50104450046 29
BRADS1625	16 Gauge	25	Galvanised	0° glue lami- nated	50	2000	2	0.94	0.94	50104450046 36
BRADS1632	16 Gauge	32	Galvanised	0° glue lami- nated	50	2000	2	1.14	1.14	50100445046 43
BRADS1638	16 Gauge	38	Galvanised	0° glue lami- nated	50	2000	2	1.30	1.30	50104450035 85
BRADS1638SS	16 Gauge	38	Stainless Steel	0° glue lami- nated	50	2000	2	1.32	1.32	50104450053 12
BRADS1645	16 Gauge	45	Galvanised	0° glue lami- nated	50	2000	2	1.50	1.50	50104450046 50
BRADS1650SS	16 Gauge	50	Stainless Steel	0° glue lami- nated	50	2000	2	1.68	1.68	50104450047 11
BRADS1664	16 Gauge	64	Galvanised	0° glue lami- nated	50	2000	2	2.04	2.04	50104450036 08
BRADS1650	16 Gauge	50	Galvanised	0° glue lami- nated	50	2000	2	1.63	1.63	50104450035 92