

R-LX-HF-ZP Zinc plated Hex with flange Concrete Screw Anchor, Part 6

Self-tapping concrete screwbolt



Approvals and Reports

- ETA 17/0783
- UKTA-22/6346



Product information

Features and benefits

- Time-efficient through-fixing installation with streamlined procedure - simply drill and drive.
- Completely removable with possibility of reuse
- Unique design with patented threadform ensures high performance for relatively small hole diameter
- Non-expansion functioning ensures low risk of damage to base material and makes R-LX ideal for installation near edges and adjacent anchors
- High performance in both uncracked and cracked concrete
- Different head types for any application
- Oversize head for fixtures with elongated holes
- Excellent product for temporary fixing
- Suitable for standard and reduced embedment depth

Applications

- Through-fixing
- Temporary anchorages
- Formwork support systems
- Balustrading & handrails
- Fencing & gates manufacturing and installation
- Racking systems
- Public seating
- Scaffolding

Base materials


Approved for use in:

- Cracked concrete C20/25-C50/60
- Non-cracked concrete C20/25-C50/60
- Hollow-core Slab C30/37-C50/60
- Reinforced concrete
- Unreinforced concrete

Also suitable for use in:


- Natural Stone (after site testing)

Installation guide

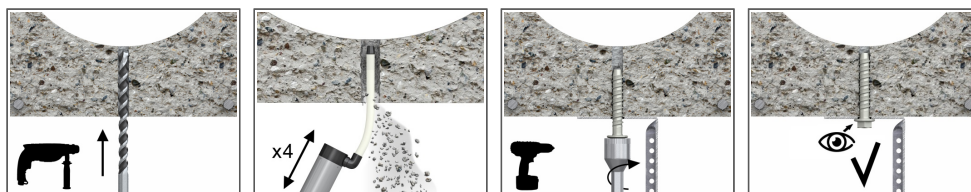


1. Drill the hole with rotary hammer drilling machine. Drill to a required depth.
2. Blow out dust at least 4 times with a hand pump.
3. Tighten the anchor to the fixture.
4. After installation a further turning of the screw must not be possible. The head of the screw must be in contact with the fixture and is not damaged.

Product information

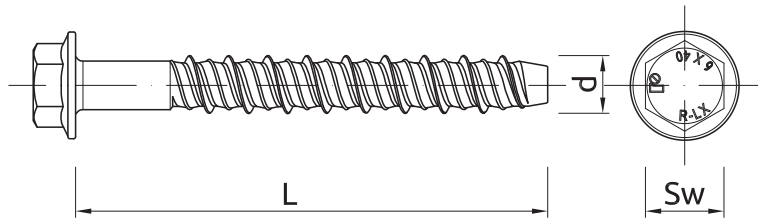

Size	Product Code	Approval type	Anchor		Fixture		
			Diameter	Length	Max. thickness t_{fix} for:		Hole diameter
			d	L	$h_{nom,red}$	$h_{nom,std}$	d_f
		-	[mm]	[mm]	[mm]	[mm]	[mm]
5	R-LX-05X035-HF-ZP	ETA-17/0806	6.2	35	-	-	7
	R-LX-05X050-HF-ZP	ETA-17/0806	6.2	50	-	7	7
	R-LX-05X075-HF-ZP	ETA-17/0806	6.2	75	-	32	7
6	R-LX-06X035-HF-ZP	ETA-17/0783	7.5	35	-	-	9
	R-LX-06X060-HF-ZP.	ETA-17/0783	7.5	60	17	5	9
	R-LX-06X075-HF-ZP	ETA-17/0783	7.5	75	32	20	9
	R-LX-06X090-HF-ZP.	ETA-17/0783	7.5	90	47	35	9
	R-LX-06X100-HF-ZP	ETA-17/0783	7.5	100	57	45	9
	R-LX-06X130-HF-ZP	ETA-17/0783	7.5	130	87	75	9
	R-LX-06X150-HF-ZP	ETA-17/0783	7.5	150	107	95	9

Installation data

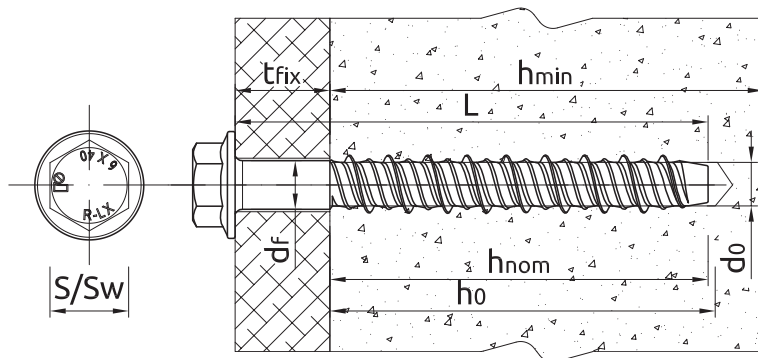


Normal concrete

Size			5	6
Thread diameter	d	[mm]	6.2	7.5
Hole diameter in substrate	d_0	[mm]	5	6
Wrench size	Sw	[mm]	8	10
External diameter of washer		[mm]	12	14
Max. torque for impact screw driver	$T_{imp,max}$	[Nm]	200	400
STANDARD EMBEDMENT DEPTH				
Min. hole depth in substrate	$h_{0,s}$	[mm]	50	65
Real hole depth in substrate	h_0	[mm]	$L + 10 - t_{fix}$	$L + 10 - t_{fix}$
Min. installation depth	$h_{nom,s}$	[mm]	43	55
Min. substrate thickness	$h_{min,s}$	[mm]	100	84
Min. spacing	$s_{min,s}$	[mm]	40	45
Min. edge distance	$c_{min,s}$	[mm]	40	45

Installation data

Size			5	6
REDUCED EMBEDMENT DEPTH				
Min. hole depth in substrate	$h_{0,r}$	[mm]	-	50
Real hole depth in substrate	h_0	[mm]	-	$L + 10 - t_{fix}$
Min. installation depth	$h_{nom,r}$	[mm]	-	39
Min. substrate thickness	$h_{min,r}$	[mm]	-	80
Min. spacing	$s_{min,r}$	[mm]	-	45
Min. edge distance	$c_{min,r}$	[mm]	-	45
Hole diameter in fixture	d_f	[mm]	-	9
MINIMUM EMBEDMENT DEPTH				
Min. hole depth in substrate	$h_{0,min}$	[mm]	-	45
Real hole depth in substrate	h_0	[mm]	-	$L + 10 - t_{fix}$
Min. installation depth	$h_{nom,min}$	[mm]	-	35
Min. substrate thickness	$h_{min,min}$	[mm]	-	80
Min. spacing	$s_{min,min}$	[mm]	-	45
Min. edge distance	$c_{min,min}$	[mm]	-	45

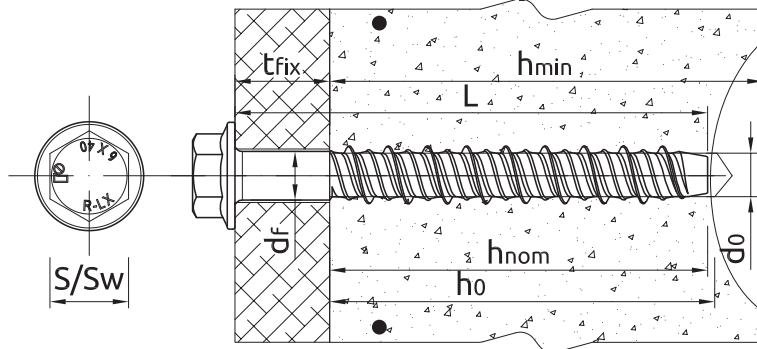

Hollow concrete slab

Size			6
Thread diameter	d	[mm]	7.5
Hole diameter in substrate	d_0	[mm]	6
Wrench size	Sw	[mm]	10
External diameter of washer		[mm]	14
Max. torque for impact screw driver	$T_{imp,max}$	[Nm]	400
MINIMUM EMBEDMENT DEPTH			
Min. hole depth in substrate	$h_{0,min}$	[mm]	45
Real hole depth in substrate	h_0	[mm]	$L + 10 - t_{fix}$
Min. installation depth	$h_{nom,min}$	[mm]	35
Minimum distance between anchor groups	$a_{min,min}$	[mm]	100
Min. spacing	$s_{min,min}$	[mm]	100
Min. edge distance	$c_{min,min}$	[mm]	100

Mechanical properties

Size			5	6
Nominal ultimate tensile strength - tension	f_{uk}	[N/mm ²]	1300	1250
Nominal yield strength - tension	f_{yk}	[N/mm ²]	1150	1100
Cross sectional area - tension	A_s	[mm ²]	19.6	28.3
Elastic section modulus	W_{el}	[mm ³]	12.2	21.2
Characteristic bending resistance	$M^0_{Rk,s}$	[Nm]	19	31.8
Design bending resistance	M	[Nm]	12.7	21.2

Basic performance data

Performance data for single anchor without influence of edge distance and spacing

Size		5	6
NON-CRACKED CONCRETE C20/25			
Standard embedment depth h_{nom}	[mm]	43.00	55.00
Reduced embedment depth h_{nom}	[mm]	-	35.00
CRACKED CONCRETE C20/25			
Standard embedment depth h_{nom}	[mm]	43.00	55.00
Reduced embedment depth h_{nom}	[mm]	-	35.00
CRACKED AND NON-CRACKED CONCRETE			
Minimum embedment depth h_{nom}	[mm]	-	35.00
Reduced embedment depth h_{nom}	[mm]	-	39.00
Standard embedment depth h_{nom}	[mm]	-	55.00
HOLLOW CORE SLAB			
Minimum embedment depth h_{nom}	[mm]	-	35.00
MEAN ULTIMATE LOAD			
TENSION LOAD $N_{Ru,m}$			
NON-CRACKED CONCRETE C20/25			
Standard embedment depth	[kN]	10.10	14.80
Reduced embedment depth	[kN]	-	12.22
CRACKED CONCRETE C20/25			
Standard embedment depth	[kN]	7.10	11.10
Reduced embedment depth	[kN]	-	8.60
SHEAR LOAD $V_{Ru,m}$			
NON-CRACKED CONCRETE C20/25			
Standard embedment depth	[kN]	14.66	18.37
Reduced embedment depth	[kN]	-	12.22
CRACKED CONCRETE C20/25			
Standard embedment depth	[kN]	10.32	12.93
Reduced embedment depth	[kN]	-	8.60
CHARACTERISTIC LOAD			
TENSION LOAD N_{Rk}			
NON-CRACKED CONCRETE C20/25			
Standard embedment depth	[kN]	7.00	12.00
Reduced embedment depth	[kN]	-	8.90
CRACKED CONCRETE C20/25			
Standard embedment depth	[kN]	4.50	7.00
Reduced embedment depth	[kN]	-	6.23
SHEAR LOAD V_{Rk}			
NON-CRACKED CONCRETE C20/25			
Standard embedment depth	[kN]	8.90	13.39
Reduced embedment depth	[kN]	-	8.90
CRACKED CONCRETE C20/25			
Standard embedment depth	[kN]	6.23	9.37
Reduced embedment depth	[kN]	-	6.23
TENSION AND SHEAR LOAD F_{Rk}			
CRACKED AND NON-CRACKED CONCRETE			
Minimum embedment depth	[kN]	-	3.00
Reduced embedment depth	[kN]	-	6.00
Standard embedment depth	[kN]	-	9.00
HOLLOW CORE SLAB			
Minimum embedment depth	[kN]	-	6.00

Basic performance data

Size		5	6
DESIGN LOAD			
TENSION LOAD N_{Rd}			
NON-CRACKED CONCRETE C20/25			
Standard embedment depth	[kN]	3.89	8.00
Reduced embedment depth	[kN]	-	5.94
CRACKED CONCRETE C20/25			
Standard embedment depth	[kN]	2.50	4.67
Reduced embedment depth	[kN]	-	4.16
SHEAR LOAD V_{Rd}			
NON-CRACKED CONCRETE C20/25			
Standard embedment depth	[kN]	5.94	8.93
Reduced embedment depth	[kN]	-	5.94
CRACKED CONCRETE C20/25			
Standard embedment depth	[kN]	4.16	6.25
Reduced embedment depth	[kN]	-	4.16
TENSION AND SHEAR LOAD F_{Rd}			
CRACKED AND NON-CRACKED CONCRETE			
Minimum embedment depth	[kN]	-	2.00
Reduced embedment depth	[kN]	-	4.00
Standard embedment depth	[kN]	-	6.00
HOLLOW CORE SLAB			
Minimum embedment depth	[kN]	-	4.00
RECOMMENDED LOAD			
TENSION AND SHEAR LOAD F_{rec}			
CRACKED AND NON-CRACKED CONCRETE			
Minimum embedment depth	[kN]	-	1.42
Reduced embedment depth	[kN]	-	2.85
Standard embedment depth	[kN]	-	4.29
HOLLOW CORE SLAB			
Minimum embedment depth	[kN]	-	2.85

Design performance data

(-) failure is not decisive

Size			5	6		
Min. installation depth	h_{nom}	[mm]	43.00	35.00	39.00	55.00
Effective embedment depth	h_{ef}	[mm]	32.00	24.70	30.00	42.00
TENSION LOAD						
STEEL FAILURE						
Characteristic resistance	$N_{Rk,s}$	[kN]	25.50	35.40	-	35.40
Partial safety factor	γ_{Ms}	-	1.40	1.40	-	1.40
PULL-OUT FAILURE; NON-CRACKED CONCRETE C20/25						
Characteristic resistance	$N_{Rk,p}$	[kN]	7.00	-	-	12.00
PULL-OUT FAILURE; CRACKED CONCRETE C20/25						
Characteristic resistance	$N_{Rk,p}$	[kN]	4.50	-	-	7.00
PULL-OUT FAILURE						
Installation safety factor	γ_{inst}	-	1.20	1.00	-	1.00
Increasing factors for $N_{Rd,p}$ - C30/37	ψ_c	-	1.08	1.08	-	1.08
Increasing factors for $N_{Rd,p}$ - C40/50	ψ_c	-	1.15	1.15	-	1.15
Increasing factors for $N_{Rd,p}$ - C50/60	ψ_c	-	1.19	1.19	-	1.19
CONCRETE CONE FAILURE						
Installation safety factor	γ_{inst}	-	1.20	1.00	-	1.00
Factor for cracked concrete	$k_{cr,N}$	-	7.70	7.70	-	7.70
Factor for non-cracked concrete	$k_{ucr,N}$	-	11.00	11.00	-	11.00
Spacing	$s_{cr,N}$	[mm]	90.00	90.00	-	126.0
Edge distance	$c_{cr,N}$	[mm]	45.00	45.00	-	63.00
CONCRETE SPLITTING FAILURE						
Installation safety factor	γ_{inst}	-	1.20	1.00	-	1.00
Spacing	$s_{cr,sp}$	[mm]	90.00	90.00	-	126.0
Edge distance	$c_{cr,sp}$	[mm]	45.00	45.00	-	63.00
TENSION AND SHEAR LOAD						
Characteristic resistance	F_{Rk}	[kN]	-	3.00	6.00	9.00
Installation safety factor	γ_{inst}	-	-	1.00	1.00	1.00
Increasing factors for $N_{Rd,p}$ - C30/37	ψ_c	-	-	1.00	1.08	1.08
Increasing factors for $N_{Rd,p}$ - C40/50	ψ_c	-	-	1.00	1.15	1.15
Increasing factors for $N_{Rd,p}$ - C50/60	ψ_c	-	-	1.00	1.19	1.19
Spacing	$s_{cr,N}$	-	-	100.0	90.00	126.0
Edge distance	$c_{cr,N}$	-	-	50.00	45.00	63.00
SHEAR LOAD						
STEEL FAILURE						
Characteristic resistance without lever arm	$V_{Rk,s}$	[kN]	12.70	17.70	-	17.70
Ductility factor	k_γ	-	0.80	0.80	-	0.80
Characteristic resistance with lever arm	$M_{Rk,s}$	[Nm]	19.00	31.80	31.80	31.80
Partial safety factor	γ_{Ms}	-	1.50	1.50	1.50	1.50
CONCRETE PRY-OUT FAILURE						
Factor	k	-	1.00	1.00	-	1.00
Installation safety factor	γ_{inst}	-	1.00	1.00	-	1.00
CONCRETE EDGE FAILURE						
Effective length of anchor	ℓ_f	[mm]	43.00	43.00	-	35.00
Anchor diameter	d_{nom}	[mm]	5.00	6.00	-	6.00
Installation safety factor	γ_{inst}	-	1.00	1.00	-	1.00

Design performance data

Characteristic Resistance under fire exposure in concrete C20/25 to C50/60

Size			6	5	6
TENSION AND SHEAR LOAD					
Spacing	s_{cr}	[mm]	120.00	168.00	-
Edge distance	c_{cr}	[mm]	60.00	84.00	-
R (for EI) = 30 min					
Effective embedment depth	h_{ef}	[mm]	30.00	42.00	32.00
TENSION LOAD					
STEEL FAILURE					
Characteristic resistance	$N_{Rk,s}$	[kN]	-	0.28	0.20
PULL-OUT FAILURE					
Characteristic resistance	$N_{Rk,p}$	[kN]	-	1.75	1.13
SHEAR LOAD					
STEEL FAILURE					
Characteristic resistance without lever arm	$V_{Rk,s}$	[kN]	-	0.28	0.20
Characteristic resistance with lever arm	$M_{Rk,s}$	[Nm]	-	0.25	0.15
TENSION AND SHEAR LOAD					
Characteristic resistance	F_{Rk}	[kN]	0.28	0.28	-
R (for EI) = 60 min					
Effective embedment depth	h_{ef}	[mm]	30.00	42.00	32.00
TENSION LOAD					
STEEL FAILURE					
Characteristic resistance	$N_{Rk,s}$	[kN]	-	0.25	0.18
PULL-OUT FAILURE					
Characteristic resistance	$N_{Rk,p}$	[kN]	-	1.75	1.13
SHEAR LOAD					
STEEL FAILURE					
Characteristic resistance without lever arm	$V_{Rk,s}$	[kN]	-	0.25	0.18
Characteristic resistance with lever arm	$M_{Rk,s}$	[Nm]	-	0.23	0.13
TENSION AND SHEAR LOAD					
Characteristic resistance	F_{Rk}	[kN]	0.25	0.25	-
R (for EI) = 90 min					
Effective embedment depth	h_{ef}	[mm]	30.00	42.00	32.00
TENSION LOAD					
STEEL FAILURE					
Characteristic resistance	$N_{Rk,s}$	[kN]	-	0.20	0.14
PULL-OUT FAILURE					
Characteristic resistance	$N_{Rk,p}$	[kN]	-	1.75	1.13
SHEAR LOAD					
STEEL FAILURE					
Characteristic resistance without lever arm	$V_{Rk,s}$	[kN]	-	0.20	0.14
Characteristic resistance with lever arm	$M_{Rk,s}$	[Nm]	-	0.18	0.10
TENSION AND SHEAR LOAD					
Characteristic resistance	F_{Rk}	[kN]	0.20	0.20	-

Design performance data

Size			6	5	6
R (for EI) = 120 min					
Effective embedment depth	h_{ef}	[mm]	30.00	42.00	32.00
TENSION LOAD					
STEEL FAILURE					
Characteristic resistance	$N_{Rk,s}$	[kN]	-	0.14	0.10
PULL-OUT FAILURE					
Characteristic resistance	$N_{Rk,p}$	[kN]	-	1.40	0.90
SHEAR LOAD					
STEEL FAILURE					
Characteristic resistance without lever arm	$V_{Rk,s}$	[kN]	-	0.14	0.10
Characteristic resistance with lever arm	$M_{Rk,s}$	[Nm]	-	0.13	0.07
TENSION AND SHEAR LOAD					
Characteristic resistance	F_{Rk}	[kN]	0.14	0.14	-

Hollow concrete slab

Size			6
Min. installation depth	h_{nom}	[mm]	35.00
Effective embedment depth	h_{ef}	[mm]	24.70
Min. bottom flange thickness	d_b	[mm]	35.00
TENSION AND SHEAR LOAD			
HOLLOW CONCRETE SLAB C30/37			
Characteristic resistance	F_{Rk}	[kN]	5.00
HOLLOW CONCRETE SLAB C40/50			
Characteristic resistance	F_{Rk}	[kN]	6.00
HOLLOW CONCRETE SLAB C50/60			
Characteristic resistance	F_{Rk}	[kN]	6.00
Installation safety factor	γ_{inst}	-	1.00
Spacing	$s_{cr,N}$	[mm]	100.00
Edge distance	$c_{cr,N}$	[mm]	50.00
SHEAR LOAD			
STEEL FAILURE			
Characteristic resistance with lever arm	$M_{Rk,s}$	[Nm]	31.80
Partial safety factor	γ_{Ms}	-	1.50

Product commercial data

Product Code	Anchor	Quantity [pcs]			Weight [kg]			Bar Codes
	Length [mm]	Box	Outer	Pallet	Box	Outer	Pallet	
R-LX-05X035-HF-ZP ₁₎	35	100	100	38400	0.10	0.10	69.2	5906675490410
R-LX-05X050-HF-ZP ₁₎	50	100	100	38400	1.02	1.02	421.7	5906675112947
R-LX-05X075-HF-ZP ₁₎	75	100	100	38400	1.17	1.17	479.3	5906675112961
R-LX-06X035-HF-ZP ₁₎	35	100	100	38400	1.26	1.26	513.8	5906675391083
R-LX-06X060-HF-ZP ₁₎	60							
R-LX-06X075-HF-ZP ₁₎	75	100	100	38400	2.1	2.1	847.9	5906675119175
R-LX-06X090-HF-ZP ₁₎	90							
R-LX-06X100-HF-ZP ₁₎	100	100	100	25600	2.7	2.7	716.1	5906675119182
R-LX-06X130-HF-ZP ₁₎	130	100	100	25600	3.3	3.3	882.5	5906675119199

Product commercial data

Product Code	Anchor	Quantity [pcs]			Weight [kg]			Bar Codes
	Length [mm]	Box	Outer	Pallet	Box	Outer	Pallet	
R-LX-06X150-HF-ZP ¹⁾	150	100	100	25600	3.8	3.8	992.6	5906675119205

1) ETA 17/0783

** the remaining range of anchoring depth includes ETA-17/0806*