Concrete screw re-usability testing gauge



Product information

Features and benefits

- Testing Gauge allows to determine whether the product R-LX is suitable for re-use.

Applications

- Concrete screw re-usability testing gauge

Installation guide

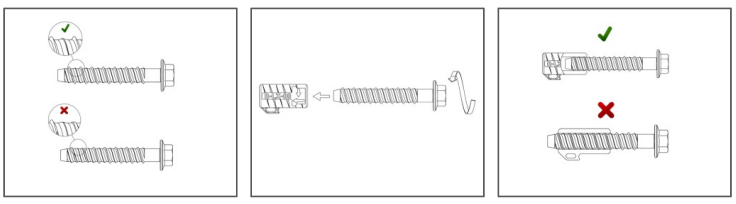

1. Visual assessment. The anchor thread shall not be damaged.
2. Drive the screw counterclockwise into the no-go gauge with at least one revolution during the test. You can re-use the anchor if its tip is not visible on the other end of the no-go gauge.
3. Screws which failed the test 1 or the test 2 are not recommended to use.

Product information

Product Code	Description
	-
R-S1-LX-TEST-08/2	Wear Gauge for R-LX-08
R-S1-LX-TEST-10/2	Wear Gauge for R-LX-10
R-S1-LX-TEST-14/2	Wear Gauge for R-LX-14

Product commercial data

Product Code	Description	Quantity [pcs]			Weight [kg]			Bar Codes
		Box	Outer	Pallet	Box	Outer	Pallet	
R-S1-LX-TEST-08/2	Wear Gauge for R-LX-08	1	1	320	0.01	0.01	33.2	5906675437408
R-S1-LX-TEST-10/2	Wear Gauge for R-LX-10	1	1	320	0.02	0.02	34.8	5906675437545
R-S1-LX-TEST-14/2	Wear Gauge for R-LX-14	1	1	320	0.02	0.02	37.0	5906675439396