

# TFIX-8M Facade fixing with metal nail

Versatile hammer-in facade fixing with steel nail recommended for ETICS.



## Approvals and Reports

- ETA-07/0336
- UKTA-22/6337



## Product information

### Features and benefits

- Simple installation in all standard substrates (A,B,C).
- Excellent plate stiffness (value 1.0 kN/mm) ensures smooth elevation surface and stable insulation system.
- The long plastic overmoulding on the TFIX-8M nail minimises thermal bridging (value 0.002W/K), contributing to energy-saving benefits.
- Unique nail design allows for high load-bearing capacities. This reduces the quantity of fixings required per square metre of insulation.
- The shortest embedment depth at the maximum strength parameters
- Pre-assembled expansion nail saves time and labour.

### Applications






- External Thermal Insulation Composite Systems (ETICS)
- Polystyrene (EPS) boards
- Mineral wool (MW) boards
- Light wood wool building boards
- Polyurethane (PU) boards
- Cork boards

### Base materials

#### Approved for use in:


- Concrete C12/15-C50/60 (Use category A)
- Solid Brick (Use category B)
- Solid Sand-lime Brick (Use category B)
- Hollow Brick (Use category C)
- Vertically-perforated clay block (Use category C)
- Hollow Sand-lime Brick (Use category C)
- Lightweight Concrete Block (Use category C)

## Installation guide



1. Drill a hole of required diameter and depth
2. Drilling depth of min 35-45mm in approved materials
3. Lightly tap the plastic sleeve through the insulation material into hole with a hammer, until fixing depth is reached and plastic sleeve flush with insulation material
4. Embedment depth of min 25mm in approved materials
5. Hammer the nail into the plastic sleeve until fixing is secure and flush with insulation material.
6. In soft insulation panels the fixing should be combined with insulation retaining plates KWL-90, KWL-110, KWL-140.

## Product information

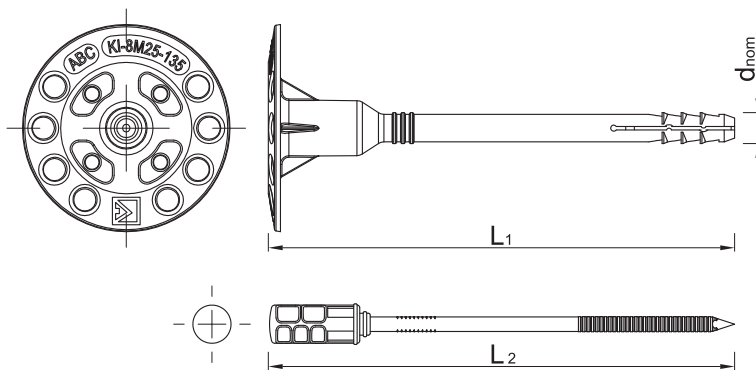

Size	Product Code	Fixing			Fixture
		Diameter	Length	Plate diameter	Recommended thick- ness
		d	L	D	t <sub>fix</sub> A, B, C
		[mm]			
Ø8	TFIX-8M-095	8	95	60	60
	TFIX-8M-115	8	115	60	80

## Installation data

Substrate			A, B, C
Hole diameter in substrate	d <sub>0</sub>	[mm]	8
Min. hole depth in substrate	h <sub>0</sub>	[mm]	35
Min. installation depth	h <sub>nom</sub>	[mm]	25
Min. substrate thickness	h <sub>min</sub>	[mm]	100
Min. spacing	s <sub>min</sub>	[mm]	100
Min. edge distance	c <sub>min</sub>	[mm]	100
Fixing diameter	d	[mm]	8

## Basic performance data

Performance data for single anchor without influence of edge distance and spacing

Substrate		Concrete	Solid brick Mz	Sand-lime solid brick KS	Sand-lime perforated brick KSL	Perforated clay brick HLZ	Lightweight concrete solid block VBI	Lightweight concrete hollow block HBI	Lightweight concrete solid V
Effective embedment depth h <sub>ef</sub>	[mm]	25	25	25	25	25	25	25	25
MEAN ULTIMATE LOAD N <sub>Rk,m</sub>									
TFIX-8M	[kN]	1.54	1.72	1.47	1.00	0.68	0.51	0.53	0.54
CHARACTERISTIC LOAD N <sub>Rk</sub>									
TFIX-8M	[kN]	1.20	1.20	1.20	0.90	0.60	0.30	0.50	0.50
DESIGN LOAD N <sub>Rd</sub>									
TFIX-8M	[kN]	0.60	0.60	0.60	0.45	0.30	0.15	0.25	0.25
RECOMMENDED LOAD N <sub>rec</sub>									
TFIX-8M	[kN]	0.43	0.43	0.43	0.32	0.21	0.11	0.18	0.18

Fixing type		TFIX-8M
Plate resistance	[kN]	1.75
Plate stiffness	[kN/mm]	1
Point thermal transmittance	[W/K]	0.002

## Product commercial data

Size	Product Code	Fixing			Quantity [pcs]			Weight [kg]			Bar Codes
		Diameter [mm]	Length [mm]	Plate diameter [mm]	Box	Outer	Pallet	Box	Outer	Pallet	
Ø8	TFIX-8M-095 <sup>1)</sup>	8	95	60	200	200	9600	4.5	4.5	246.0	5906675188768
	TFIX-8M-115 <sup>1)</sup>	8	115	60	200	200	8000	5.1	5.1	234.2	5906675188775

1) ETA-07/0336