

TFIX-8ST-TOOL Setting tool

Accessory for installation of screw fixing TFIX-8ST with T40 bit



Product information


Features and benefits

- Integrated disc facilitates optimum TFIX-8S installation, setting the flange flush with the surface of the insulation
- User-friendly - enables fast and easy installation
- Torx-40 bit type

Applications


- Façade construction (ETICS)
- Polystyrene boards
- Polyurethane boards
- Mineral wool (MW) boards

Installation guide

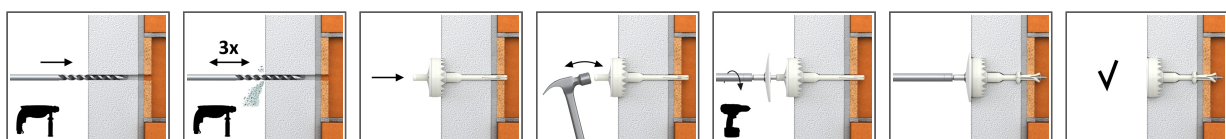

1. Drill a hole of required diameter and depth
2. Drilling depth of min 35mm in A,B,C,D materials and 75mm in Aerated Concrete Block
3. Lightly tap the plastic sleeve through the insulation material into hole with a hammer, until fixing depth is reached
4. Embedment depth of min 25mm in A,B,C,D materials and 65mm in Aerated Concrete Block
5. When using the KWX-63 the teeth should be embedded in the insulation material after hammering.

Product information

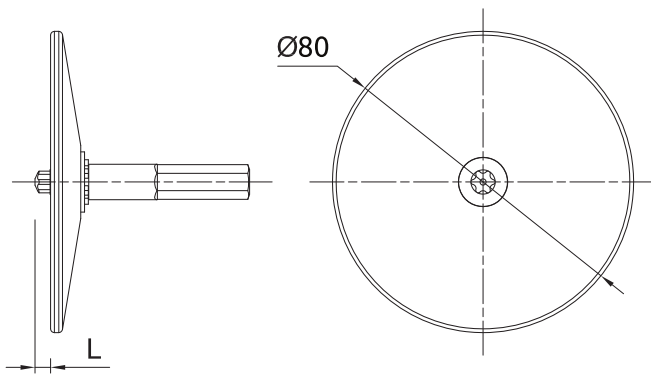

Product Code	Bite type	Diameter	Length
		d	L
		[mm]	
TFIX-8ST-TOOL	T40	80	15

Product commercial data

Size	Product Code	Diameter [mm]	Length [mm]	Fixing			Quantity [pcs]			Weight [kg]			Bar Codes
				Diameter [mm]	Length [mm]	Plate diameter [mm]	Box	Outer	Pallet	Box	Outer	Pallet	
	TFIX-8ST-TOOL	80	15				1	16	384	0.09	1.36	62.6	5906675056654
Ø8	TFIX-8ST-A2-115			8	115	60	100	100	3200	4.3	4.3	168.6	5906675071589
	TFIX-8ST-A2-135			8	135	60	100	100	3200	4.7	4.7	181.0	5906675071596
	TFIX-8ST-A2-155			8	155	60	100	100	3200	5.0	5.0	189.0	5906675071602
	TFIX-8ST-A2-175			8	175	60	100	100	3200	5.3	5.3	199.0	5906675071619
	TFIX-8ST-A2-195			8	195	60	100	100	3200	5.6	5.6	209.2	5906675071626
	TFIX-8ST-A2-215			8	215	60	100	100	3200	5.9	5.9	218.5	5906675071633
	TFIX-8ST-A2-235			8	235	60	100	100	3200	6.1	6.1	225.2	5906675071640
	TFIX-8ST-A2-255			8	255	60	100	100	3200	6.6	6.6	240.6	5906675071657
	TFIX-8ST-A2-275			8	275	60	100	100	3200	6.6	6.6	240.0	5906675071664
	TFIX-8ST-A2-295			8	295	60	100	100	3200	6.9	6.9	249.9	5906675071671
	TFIX-8ST-115-ECO			8	115	60	100	100	4800	4.0	4.0	222.0	5906675086491
	TFIX-8ST-135-ECO			8	135	60	100	100	4000	4.5	4.5	208.8	5906675089294
	TFIX-8ST-155-ECO			8	155	60	100	100	3200	5.0	5.0	189.0	5906675089300
	TFIX-8ST-175-ECO			8	175	60	100	100	3200	5.1	5.1	192.0	5906675089317
	TFIX-8ST-195-ECO			8	195	60	100	100	3200	5.4	5.4	201.8	5906675089324
	TFIX-8ST-215-ECO			8	215	60	100	100	3200	5.7	5.7	212.9	5906675089331
	TFIX-8ST-235-ECO			8	235	60	100	100	4000	6.1	6.1	274.0	5906675089348
	TFIX-8ST-255-ECO			8	255	60	100	100	3200	6.2	6.2	229.0	5906675089355
	TFIX-8ST-275-ECO			8	275	60	100	100	4000	6.6	6.6	292.5	5906675089362
	TFIX-8ST-295-ECO			8	295	60	100	100	3200	7.0	7.0	254.0	5906675089379
	TFIX-8ST-335-ECO			8	335	60	100	100	2400	7.8	7.8	215.9	5906675089386
	TFIX-8ST-355-ECO			8	355	60	100	100	2400	8.4	8.4	230.7	5906675118758
	TFIX-8ST-375-ECO			8	375	60	50	50	1200	4.7	4.7	141.6	5906675118765
	TFIX-8ST-395-ECO			8	395	60	50	50	1200	4.9	4.9	146.7	5906675118772
	TFIX-8ST-415-ECO			8	415	60	50	50	1200	4.7	4.7	141.8	5906675118789
	TFIX-8ST-435-ECO			8	435	60	50	50	1200	5.2	5.2	155.4	5906675118802
	TFIX-8ST-455-ECO			8	455	60	50	50	1200	5.0	5.0	150.2	5906675335155