

# Sharp point screws for wood

## Sharp point screws for render board & timber



## Product information

### Features and benefits

- Thread geometry allowing application in all wood materials
- The optimised head geometry with underhead cutting ribs also affords an exact and splinter-free surface finish even with connections close to the edge
- The double cone head allows flush fixing of the screw
- Easy to screw-in
- Notched thread and wax coating for reduced friction
- Crack avoidance
- Clean application
- Power and battery-saving
- TX drive guarantees secure transmission of screw-in torque and no pop-out of the bit
- Wide range of dimensions and surfaces

### Applications


- Chipboards
- Laminated wood and exotic wood construction
- Plywood
- Anchoring of wood connection elements
- Wooden fences
- Wooden elements

### Base materials

#### Approved for use in:

- Chipboard
- Wood
- Timber
- Timber
- Plywood

## Installation guide

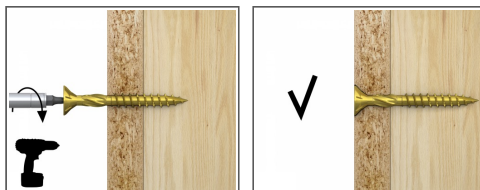

1. Choose the right length and diameter of the screw
2. Drive the screw straight until the head is flush
3. Screws with partial thread can clamp wooden parts avoiding spaces between them
4. Full-thread screws are recommended for fastening thin parts and in less firm wood materials (e.g. soft woods)
5. Screws with countersunk head allow flush connection

## Product information

Size	Product Code	Screw		Screw drive
		Diameter	Length	
		d [mm]	L [mm]	-
6,0	R-UCF-A2-60120	6	120	T30
	R-UCF-A2-60140	6	140	T30
	R-UCF-A2-60180	6	180	T30
	R-UCF-A2-60200	6	200	T30
	R-UCF-A2-60220	6	220	T30
	R-UCF-A2-60240	6	240	T30
	R-UCF-A2-60260	6	260	T30
	R-UCF-A2-60280	6	280	T30
8,0	R-UCF-A2-80350	8	350	T40

## Product commercial data

Product Code	Screw	Quantity [pcs]			Weight [kg]			Bar Codes
	Length [mm]	Box	Outer	Pallet	Box	Outer	Pallet	
R-UCF-A2-60120	120	100.0	100.0	-	1.54	1.54		5906675420653
R-UCF-A2-60140	140	100.0	100.0	-	1.79	1.79		5906675420660
R-UCF-A2-60180	180	100.0	100.0	-	2.3	2.3		4043377201553
R-UCF-A2-60200	200	100.0	100.0	-	2.6	2.6		5906675420684
R-UCF-A2-60220	220	100.0	100.0	-	2.8	2.8		5906675420707
R-UCF-A2-60240	240	100.0	100.0	-	3.1	3.1		5906675420714
R-UCF-A2-60260	260	100.0	100.0	-	3.3	3.3		5906675420691
R-UCF-A2-60280	280	100.0	100.0	-	3.6	3.6		5906675420738
R-UCF-A2-80350	350	100.0	100.0	-	8.0	8.0		5906675420745