


TFIX-8S-TOOL Setting tool

Accessory for installation of screw fixing TFIX-8S with T40 bit

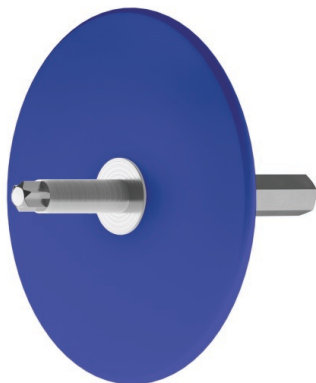

Product information


Features and benefits

- Integrated disc facilitates optimum TFIX-8S installation, setting the flange flush with the surface of the insulation
- User-friendly - enables fast and easy installation
- Torx-40 bit type

Applications


- Polystyrene (EPS) boards
- Polyurethane (PU) boards
- Mineral wool (MW) boards
- Light wood wool building boards
- Façade construction (ETICS)

Installation guide

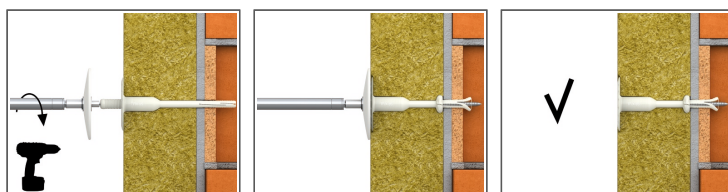

1. Insert driver bit into recess in head moulding of R-TFIX-8S screw.
2. [English]: W podłożach kategorii A,B,C,D minimalna głębokość wiercenia wynosi 35mm, w podłożu E - gazobetonie 75mm.
3. Steadily drive in the screw with high revs until fixing is secure (when disc touches insulation surface).

Product information

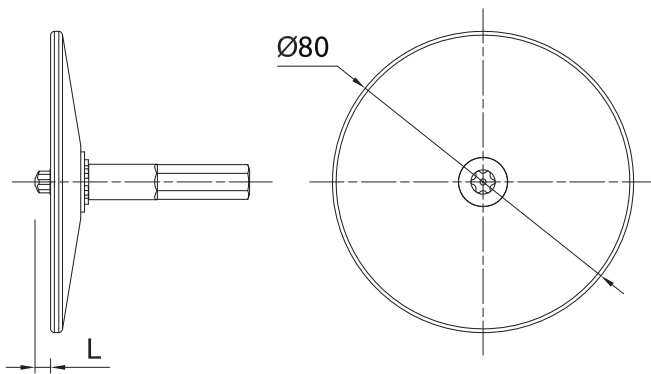

Product Code	Bite type	Diameter	Length
		d	L
		[mm]	
TFIX-8S-TOOL	T40	80	4

Product commercial data

Size	Product Code	Diameter [mm]	Length [mm]	Fixing			Quantity [pcs]			Weight [kg]			Bar Codes
				Diameter [mm]	Length [mm]	Plate diameter [mm]	Box	Outer	Pallet	Box	Outer	Pallet	
Ø08	TFIX-8S-TOOL	80	4				1	16	384	0.10	1.60	68.4	5906675032450
	TFIX-8S-115			8	115	60	200	200	8000	5.8	5.8	263.7	5906675033853
	TFIX-8S-135			8	135	60	200	200	8000	6.4	6.4	286.4	5906675027579
	TFIX-8S-155			8	155	60	200	200	6400	7.2	7.2	259.8	5906675028774
	TFIX-8S-175			8	175	60	200	200	6400	7.8	7.8	278.9	5906675028323
	TFIX-8S-195			8	195	60	200	200	6400	8.5	8.5	301.7	5906675027845
	TFIX-8S-215			8	215	60	100	100	4000	4.8	4.8	223.5	5906675028026
	TFIX-8S-235			8	235	60	100	100	4000	5.1	5.1	233.8	5906675028347
	TFIX-8S-255			8	255	60	100	100	4000	5.4	5.4	244.0	5906675049670
	TFIX-8S-275			8	275	60	100	100	4000	5.7	5.7	258.0	5906675018843
	TFIX-8S-295			8	295	60	100	100	4000	6.2	6.2	276.0	5906675018850
	TFIX-8S-335			8	335	60	100	100	4000	6.7	6.7	297.4	5906675018867
	TFIX-8S-355			8	355	60	100	100	3200	7.3	7.3	263.3	5906675088044
	TFIX-8S-375			8	375	60	100	100	3200	7.5	7.5	271.1	5906675087313
	TFIX-8S-395			8	395	60	50	50	1600	4.3	4.3	166.1	5906675079042
	TFIX-8S-415			8	415	60	50	50	1600	4.5	4.5	172.3	5906675088822
	TFIX-8S-435			8	435	60	50	50	1600	4.6	4.6	177.3	5906675117140
	TFIX-8S-455			8	455	60	50	50	1600	4.7	4.7	180.1	5906675335131