

# RAWL-IN-ONE MULTI PURPOSE PLUG

The all-purpose plug which accepts a variety of screw sizes.



## Product information

### Features and benefits

- Flange ensures flush fit to surface. Can be collapsed for deep setting in solid materials.
- Anti-rotation fins prevent spinning when tightening screw.
- Engineered grip feature for extra holding power.
- Twin expansion points for a strong fix in hollow, solid or combination materials.
- Hollow walls (plasterboard, plywood, chipboard etc) sizes 5 & 6mm only.
- Solid walls (brickwork, blockwork, concrete ets) and combination walls (dry lined walls) all plugs.

### Applications


- Lighting
- Pictures
- Skirting / Dado railing
- Shelves
- Trunking
- Cable trays
- Electrical fittings

### Base materials

#### Suitable for use in

- Lightweight Concrete Block
- Plywood
- Plasterboard
- Chipboard
- Concrete
- Solid Brick
- Hollow Brick
- Aerated Concrete Block

## Installation guide

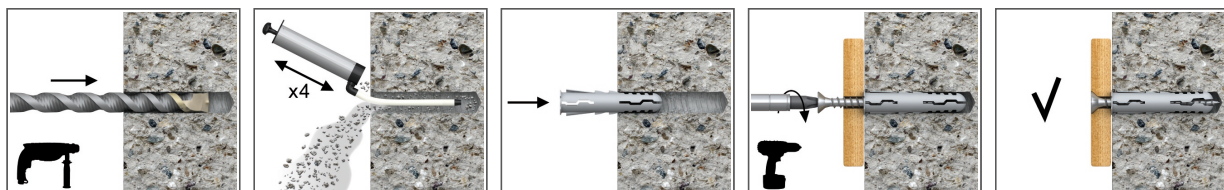

1. Drill a hole of required diameter.
2. Insert FIX plug into the hole and tap home.
3. Insert screw of required diameter into plug through fixture and tighten.

### Product information

Product Code	Plug	Hole diameter		Screw size
	Diameter	Solid substrates	Hollow & Combination substrates	
	d			
	[mm]			
R-RIO-48-C	5	5	4.5	3.0-5.0

### Product commercial data

Product Code	Quantity [pcs]			Weight [kg]			Bar Codes
	Box	Outer	Pallet	Box	Outer	Pallet	
R-RIO-48-C	1	1	168	0.62	0.62	134.2	5010445676147