

KWL Insulation retaining plate

Insulation retaining plate for use in combination with facade fixings from TFIX and KI ranges



Product information

Features and benefits

- Quick and easy application possible with all ETICS fixings.
- Polyamide standard versions are recommended for cost-effective applications.
- A versatile solution for many insulation scenarios.

Applications


- External Thermal Insulation Composite Systems (ETICS)
- Polystyrene (EPS) boards
- Mineral wool (MW) boards
- Polyurethane (PU) boards

Base materials

Approved for use in:


- Polystyrene (EPS) Boards
- Mineral Wool Boards

Installation guide

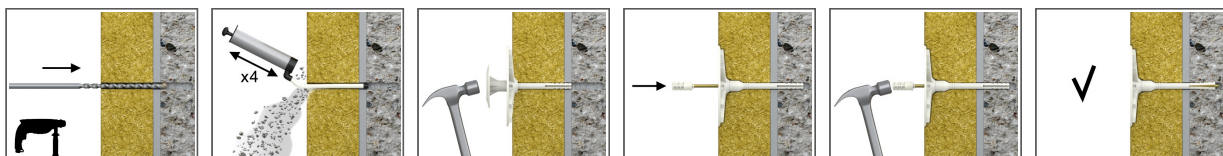

1. Insert chosen TFIX or KI fixing through hole in centre of KWL flange.
2. Follow installation procedure for relevant TFIX or KI fixing.

Product information

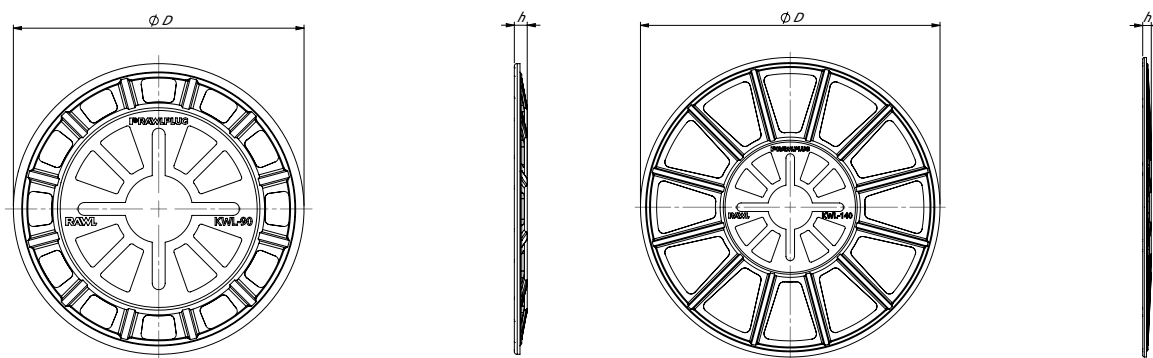

Size	Product Code	Fixing		
		Screw diameter	Length	Plate diameter
		d	L	D
		[mm]		
Ø90	R-KWL-090	90	15	60
Ø110	KWL-110PP	110	15	60
Ø140	R-KWL-140	140	15	60

Product commercial data

Size	Product Code	Fixing			Quantity [pcs]			Weight [kg]			Bar Codes
		Screw diameter [mm]	Length [mm]	Plate diameter [mm]	Box	Outer	Pallet	Box	Outer	Pallet	
Ø90	R-KWL-090	90	15	60	200	200	11200	1.64	1.64	121.8	5906675262543
Ø110	KWL-110PP	110	15	60	200	200	3200	2.1	2.1	63.4	5906675266046
Ø140	R-KWL-140	140	15	60	200	200	6400	5.0	5.0	188.4	5906675217024